


Industrial

3E-34N Series

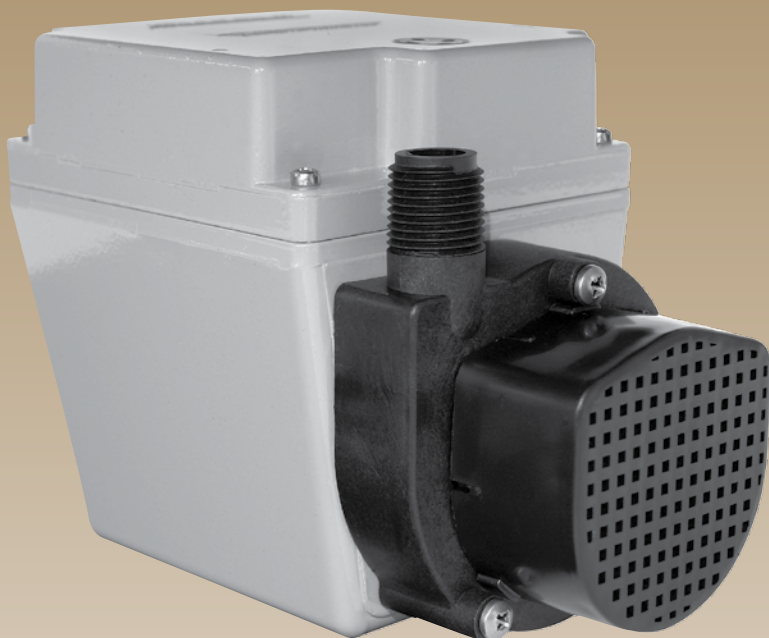

Features


- For submersed or in-line use
- Epoxy-coated die-cast aluminum housing
- Oil-filled motor
- 20.3' maximum lift
- 208 watts
- 1/2" MNPT discharge
- Thermal overload protection

Construction

- Motor: 1/15 hp oil-filled
- Intermittent Liquid Temp. up to - 120° F
- Intake: 3/4" FNPT
- Discharge: 1/2" MNPT
- Housing: Epoxy-coated cast aluminum
- Cover: Epoxy-coated cast aluminum
- Volute: Nylon
- Impeller: Nylon
- Shaft Seal: Fluoroelastomer (FKM)
- Screen: Polypropylene

LittleGIANT.

Dimensional Outline

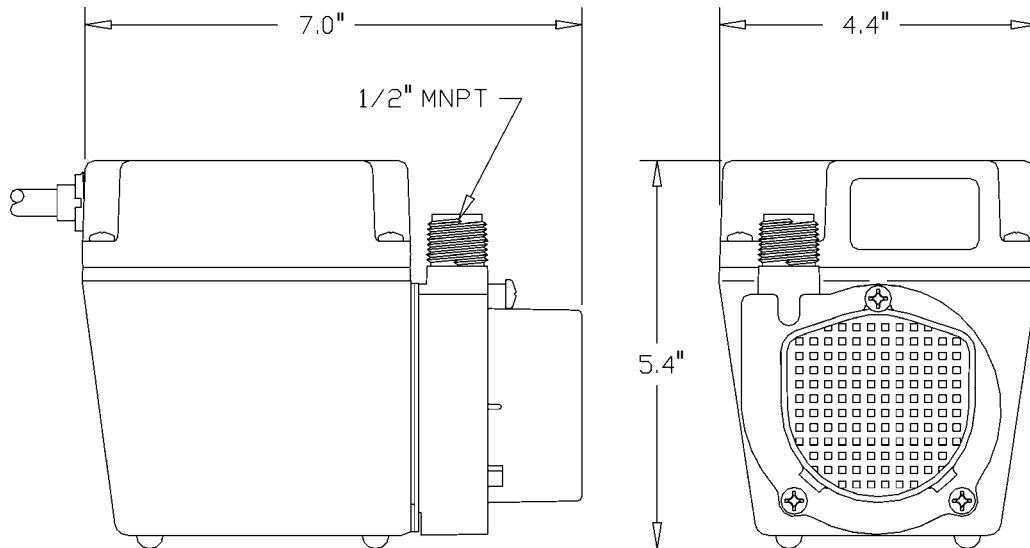


Engineering Data

Model No.	Item No.	Discharge	Intake	HP	Volts	Hz	Amps	Watts	Performance (GPH@Head)				Shutoff		Cord Length (ft)	Weight (lbs.)
									1'	3'	5'	10'	Ft	PSI		
3E-34N	503603	1/2" MNPT	3/4" MNPT	1/15	115	60	3.2	200	670	650	575	460	20.3	8.8	10	4.83

Volute	103337
Impeller	103437
Screen	102376
Gasket	103601

Performance Data

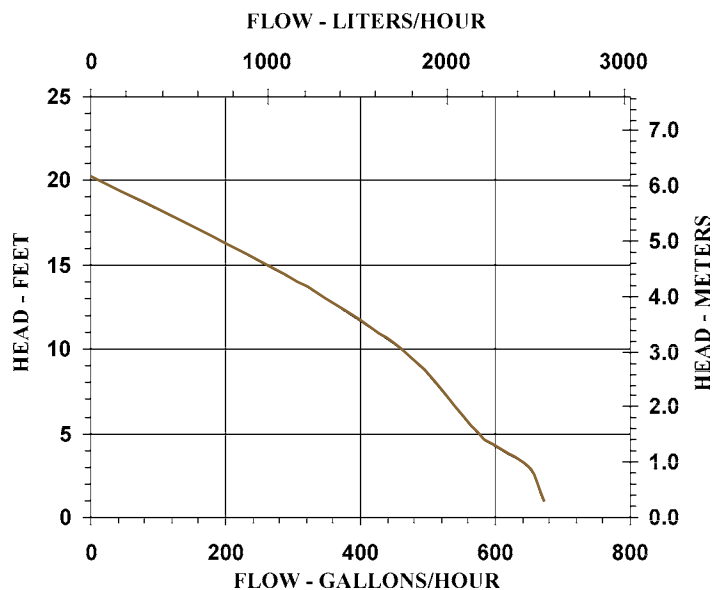

Franklin Electric

P.O. Box 12010
Oklahoma City, OK 73157-2010
Phone: 1.800.701.7894
Fax: 1.800.678.7867
www.franklinwater.com