This form is regarded to be in compliance with 29 CFR Part 1910.1200

SECTION 1 : IDENTIFICATION

PRODUCT NAME:Cuccio Colour- Eye Candy in MiamiProduct Use:Nail LacquerManufacturer's Name :Star Nail International, Inc.Address :29120 Avenue PaineCity, State, Zip :Valencia, CA 91355

Chemical Family : Proprietary Mix CAS# N/A

Preparation Date: March 30, 2016


24 HR. EMERGENCY TELEPHONE: CHEMTEL 1-813-248-0573

SECTION 2: Hazardous Identification

Section 2.1 - Classification of the substance or mixture:

Hazard Class	Hazard Category
Flammable Liquid	Category 2
Acute Oral Toxicity	Category 4
Skin Corrosion / Irritation	Category 2
Serious Eye Damage/ Eye Initation	Category 2
STOT - Single Exposure	Category 3

Section 2.2 - Label Elements

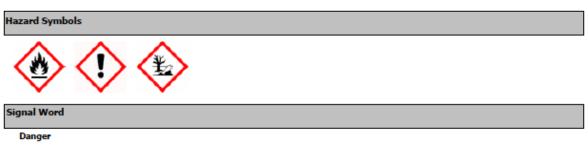

Hazard Statements

H225- Highly flammable liquid and vapour. H302- Harmful if swallowed. H315- Causes skin irritation. H319- Causes serious eye irritation. H335- May cause respiratory irritation. H336- May cause drowsiness or dizziness.

H410- Very toxic to aquatic life with long lasting effects.

Precautionary Statements

PREVENTION

P210 - Keep away from heat/sparks/open flames/hot surfaces - No smoking

- P233- Keep container tightly closed.
- P240- Ground/bond container and receiving equipment.
- P242- Use only non-sparking tools.
- P243- Take precautionary measures against static discharge.
- P261- Avoid breathing dust/fume/gas/mist/vapours/spray.
- P264- Wash skin thoroughly after handling. P270- Do no eat, drink or smoke when using this product.
- P280- Wear protective gloves/protective clothing/eye protection/face protection.

RESPONSE

P301+P310+P331- IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Do NOT Induce vomiting. P303+P361+P353- IF ON SKIN or hair: Remove immediately all contaminated clothing. Rinse skin with water/shower. P304+P340- IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. P305+P351+P338- IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, continue rinsing. P332+P313- If skin irritation occurs: Get medical advice/attention. P337+P313- If eye irritation persists: Get medical advice/attention. P370+P378- In case of fire: Use appropriate media for extinction.

STORAGE

P402+P404- Store in a dry place. Store in a closed container. P403+P233- Store in a well-ventilated place. Keep container tightly closed. P403+P235- Store in a well-ventilated place. Keep cool.

DISPOSAL

P501- Dispose of contents/container in accordance with local, regional, national, and/or international regulations.

Section 2.3 - Hazards to health and environment

Most important adverse effects

Skin Irritation	Mild skin irritant, can cause non-allergic contact dermatitis
Eye Initation	Eye initant - both liquid and vapor
Respiratory Sensitization	Prolonged inhalation may be harmful. Can cause headaches, nausea, vomiting, and narcosis. May cause lung irritation.
Ingestion Hazard	Causes gastro-intestinal irritation, vomiting, and diarrhea. Kidney damage.

Potential environmental effects

Highly Flammable

CAS #	EINECS#	Name	Weight %	Classification Regulation (EC) No 1278/2008 (CLP)	REACH #
141-78-6	205-500-4	Ethyl Acetate	28 - 38 %	Flammable Liquid-2 Eye Imtation-2 STOT (SE)-3 H225; H319; H336; EUH066	
123-86-4	204-658-1	Butyi Acetate	19 - 29 %	Flammable Liquid-3 STOT (SE)-3 H225; H319; H336; EUH066	
9004-70-0	N/A	Nitrocellulose	4 - 14 %	Flammable Solid-1 Skin Imtation-2 Eye Intation-2 H200; H205	
67-63-0	200-661-7	Isopropyl Alcohol	0-9 %	Flammable Liquid-2 Eye Irritation-2 STOT (SE)-3 H225; H319; H336	
115-86-6	204-112-2	Triphenyi Phosphate*	0 - 9 %	Aquatic Acute-1 Aquatic Chronic-2 H410	
109-60-4	203-686-1	Propyl Acetate	0 - 9 %	Flammable Liquid-2 Eye Irritation-2 STOT (SE)-3 H225; H336; H319; EUH066	
71-36-3	200-751-6	n-Butyi Alcohol **	0 - 7 %	Flammable Liquid-3 Acute Toxicity-4 Skin Emtation-2 Eye Damage-1 STOT (SE)-3 H226; H302; H315; H318; H335; H336	

SECTION 3: Composition/Information on Ingredients

*Please refer to section 14

**Indicates toxic chemical (s) subject to the reporting requirements of Section313 of Title III and of 40 CFR 372.

NOTE: Definition of listed Hazard Symbols can be found in (Section 2).

SECTION 4 : First Aid Measures

Section 4.1 - Description of First Aid Measures

Ingestion:	SEEK IMMEDIATE MEDICAL ATTENTION. Do NOT induce vomiting.
Inhalation :	Remove to fresh air. Seek medical attention.
Skin Contact :	Wash affected area with soap and water.
Eves :	Irrigate with large amounts of water. Seek medical attention.

Section 4.2 - Most important symptoms and effects

Symptoms:	Drowsiness, headaches, nausea, vomiting, dermatitis, diarrhea, narcosis
Effects:	Non-allergic dermatitis. Skin and eye irritation.
	Vapor from solvents may cause: ill effects to the renal system; central nervous system problems;
	irritation to the respiratory tracts and other various mucosal membranes

Section 4.3 - Indication of immediate medical attention and special treatment needed

Hazards:	No data available
Treatment:	Treat Symptomatically

SECTION 5: Fire Fighting Measures

Section 5.1 - Extinguishing media

Suitable extinguishing measures

 Small fire:
 Carbon Dioxide, foam or dry chemical extinguishers.

 Large fire:
 Water or foam extinguishers, water fog.

 Note:
 In all cases keep nearby containers cool by spraying with water fog.

Unsuitable extinguishing measures

Do not use a solid water stream as it may scatter and spread fire.

Section 5.2 - Special hazards arising from substance or mixture

Specific hazards during fire fighting:

Vapors are heavier than the air and spread along the ground. Vapors may form explosive mixtures with air. Flashback possible. Under conditions giving incomplete combustion, hazardous gases produced may consist of: Carbon Monoxide (CO, Carbon Dioxide (CO2), Carbon Oxides, Nitrous Oxides.

Section 5.3 - Advice to firefighters

For fires wear self-contained breathing apparatus. Do not inhale vapors/smoke.

SECTION 6 : Accidental Release Measures

Section 6.1 - Personal Precautions, protective equipment and emergency procedures

Use suitable protective clothing/equipment. Eliminate all sources of ignition. No Smoking. Use only spark resistant tools. Bond and Ground Containers.

Section 6.2 - Environmental Precautions

Do not allow to enter water or drains. Dispose in accordance with federal, state, local and regional regulations. Local authorities should be advised if significant spills cannot be contained.

Section 6.3 - Methods of Containment & Cleaning Up

Eliminate sources of ignition.

Small Spills - Absorb spill with vermiculite, earth, sand, or other inert material, then place in a container for hazardous waste.

Large Spills - Contain spill with absorbent. Prevent runoff from entering drains, sewers, or streams. Absorb spill with vermiculite, earth, sand, or other inert material, then place in a container for hazardous waste.

Section 6.4 - Reference to other sections

For personal protection, see section 8 For disposal considerations, see section 13

SECTION 7 : Handling and Storage

Section 7.1 - Precautions for Safe Handling -

No Smoking

Prevent static discharges. Always use proper bonding and grounding procedures. Exposure by inhalation or skin contact should be minimized by good industrial hygiene. Vapor is heavier than air, spreads along the ground. Vapor can form an explosive mixture in air, common in empty unclean pails/drums. Use non-sparking tools when handling this material.

Section 7.2 - Conditions for Safe Storage -

Storage:

Keep containers tightly closed, cool, dry & away from sources of ignition, label containers Eliminate possible point ignition sources, e.g. No smoking, Naked flames, use proper bonding and grounding. Use electrical equipment rated for use with flammables. Incompatible With: Strong oxidizing agents. Acids, Alkaline, and Peroxides

Section 7.3 - Specific end uses - Recommendations:

For Use on Nails

SECTION 8 : Exposure Controls/ Personal Protection

Section 8.1 - Exposure Limit Values

Substance	OSHA - PEL TWA	ACGIH - TLV TWA	EU EXPOSURE LIMITS
Ethyl Acetate	400 ppm	400 ppm	400 ppm
Butyl Acetate	150 ppm	150 ppm	150 ppm
Nitrocellulose	Not established	Not established	
Isopropyl Alcohol	200 ppm	400 ppm	400 ppm
Triphenyl Phosphate*	3mg/m3	3mg/m3	3 mg/m3
Propyl Acetate	200 ppm	200 ppm	200 ppm
n-Butyl Alcohol **	20 ppm	100 ppm	50 ppm

Ventilation of appropriate design is necessary to meet the above levels.

Section 8.2 - Exposure Controls

Use only with adequate ventilation; local exhaust of general room ventilation is usually required.

8.2.1 Engineering Controls:

Ensure adequate air ventilation in work areas to minimize exposure. Provide appropriate exhaust ventilation where dust or vapor can be generated. Eyewash stations, showers. Bonding and grounding. Rated electrical machinery.

8.2.2 Personal Protective Equipment:

Appropriate PPE should be worn. Check federal, state, local and regional regulations.

- a) Respiratory protection: If the maximum exposure levels above are surpassed, respiratory protection is required.
- b) Hand protection: Protective Gloves (such as butyl-rubber or polyvinylchloride / nitrile rubber)
- c) Eye protection: Protective Goggles
- d) Skin protection: Protective clothing.
 - Wear face-shield and protective suit for abnormal processing problems.
 - Avoid wearing clothing that may produce static charge.
 - Fire resistant clothing is recommended.

Section 8.3 Environmental Exposure Controls

Do not allow to enter water ways or drains. Federal, state, local and regional regulations authorities should be advised if significant spills cannot be contained.

Section 8.4 Hazard Rating

HMIS Rating (0=least, 1=slight, 2=moderate, 3=serious, 4=severe)

Health: 2 Fire: 3 Reactivity:1 PP:G

SECTION 9 : Physical and Chemical Properties

Section 9.1 - General Information Appearance: Liquid Odor: Characteristic Ester Odor

Section 9.2 - Important health, safety and environmental information Odor Threshold: No data available PH: Not applicable Melting/Freezing Point: Undefined Initial Boiling Point and Boiling Point Range: 75-80° C Flash Point: - 4° C or 24° F Method: TCC (Tag Closed Cup) Evaporation Rate: Undefined Flammability: Flammable, Category 2 Upper/lower explosion limits: Undefined Vapor Pressure: Undefined Vapor Density: Heavier than air Relative Density: Undefined Solubility: Undefined Water Solubility: Insoluble N-Octanol/Water Partition coefficient: Undefined Autoignition Temperature: Undefined Decomposition Temperature: Undefined

Viscosity: 600 - 700cps Explosive Properties: Vapors may form explosive mixture with air. Oxidizing Properties: Not applicable

Specific Gravity (H2O=1): 0.988 - 1.028

SECTION 10 : Stability and Reactivity

- Section 10.1 Reactivity Vapors may form explosive mixture with air.
- Section 10.2 Chemical Stability

Stable under recommended storage conditions. Store away from direct sunlight.

Section 10.3 - Possibility of Hazardous Reactions: Hazardous Polymerization will not occur.

Section 10.4 - Conditions to Avoid Flame, electric spark, static and heat.

Section 10.5 - Incompatible Materials Strong oxidizing agents. Acids, Alkaline, and Peroxides.

Section 10.6 - Hazardous Decomposition Products

Oxides of Carbon, nitrous Oxides.

SECTION 11: Toxicological Information

~

Section 11.1 Product Information

	May cause drowsiness and dizziness based on components. May cause irritation of respiratory tract.	
	Initating to eyes	
Skin Contact	May cause irritation	

Section 11.2 Acute Toxicity

Substance	LD50 ORAL [mg/kg]	LD50 DERMAL [mg/kg]	LC50 INHALATION [mg/l]
Ethyl Acetate	5,620	18,000	6
Butyl Acetate	10,700	17,600	21
Nitrocellulose	5,000	0	0
Isopropyl Alcohol	5,045	12,800	73
Triphenyl Phosphate*	20,000	10,000	5,000
Propyl Acetate	8,700	17,800	32
n-Butyl Alcohol **	2,292	3,430	18

Section 11.3 Acute Toxicity Calculations

Mutagenicity:

Carcinogenicity:

|--|

Section 11.4 - Chronic Toxicity and CMR Effects

Reproductive Toxicity: Not Classified

Not Classified

The table below indicates whether each agency has listed any ingredients as a carcinogen

Components	NTP	IARC	OSHA
Isopropyl Alcohol		Group 3	

IARC (International Agency For Research on Cancer)

Group 2B - Probably Carcinogenic to Humans

Group 3 - Not Classifiable as to Carcinogenicity in Humans

OSHA (Occupational Safety and Health Administration to the US Department of Labor) X - Present

SECTION 12: Ecological Information

Section 12.1 - Toxicity

Toxicity to Algae	Toxicity to Fish	Toxicity to Microorganisms	Daphnia Magna (Water Fica)
3300 mg/L (IUCLID: 48 hr. Scenedesmus quadricauda)	LC50: 230 mg/L (IUCLID: 96hr, Fathead minnow)	Bacteria: 2900mg/L (IUCLID:16hr. Pseudomonas putida)	720 mg/L (IUCLID 48hr, Daphnia magna)
675 mg/L (IUCLID: 72 hr. Desmodesmus subspicatus)	LC50: 100 mg/L (IUCLID: 96hr, Fathead minnow)	Not Availble	72 mg/L (IUCLID 72hr, Daphnia magna)
LC50 / 96h Selenastrum capricomutum	No information available	No Information available	No information available
ERC 50, alga Soenedesmus sp. static, growthrate inhibition, 72hr: > 1000 mg/L NOEC, alga Soenedesmus sp. static, growth inhibition, (cell density reduction) 7 d: 1800 mg/L	ECS0, fathead minnow, static, 24hr Immobilization: > 1000 mg/L	ERC50: activated sludge: > 1,000 mg/L	water flea Daphnia magna, static renewal, 21 d, NOEC: 30mg/L
Chronic LOEC, Selenastrum capricomiutum, 0.5 to 5 mg/L	Acute LC50, Oncorhynchus mykiss, 96hr. 0.4mg/L	Not Available	Acute EC50, 48hr, 1mg/L
ERC 50, green aiga Pseudokirchneriella subcapitata, static, growth rate inhibition, 72hr: 672 mg/L	LC50: Fathead minnow, flow-through 96hr: 60mg/L	EC5; Pseudomonas putida, static, 16hr: 170mg/L	EC50, water flea Daphnia magna, static, 48hr immobilization: 91.5 mg/L
EC 50, Pseudokirchneriella subcapitata, growth rate, 96hr: 225 mg/L, OECD 201	LC50: 1,376 mg/L (96hr, Fathead minnow), OECD 203	EC50: (Pseudomonas putida, 17hr growth Inhibition):4390mg/L, DIN38412, PART 8	LC50 (water flea Daphnia magna 48hr): 1,328 mg/L, OECD202
	3300 mg/L (IUCLID: 48 hr. Scenedesmus quadricauda) 675 mg/L (IUCLID: 72 hr. Desmodesmus subspicatus) LCS0 / 96h Selenastrum capricomutum ERC 50, alga Scenedesmus sp. static, growthrate inhibition, 72hr: > 1000 mg/L NOEC, alga Scenedesmus sp. static, growth inhibition, (cell density reduction) 7 d: 1800 mg/L Chronic LOEC, Selenastrum capricomlutum, 0.5 to 5 mg/L ERC 50, green alga Pseudokirchneriella subcapitata, static, growth rate inhibition, 72hr: 672 mg/L EC 50, Pseudokirchneriella subcapitata, growth rate, 96hr: 225 mg/L, OECD	3300 mg/L (IUCLID: 48 hr. Scenedesmus quadricauda) LC50: 230 mg/L (IUCLID: 96hr, Fathead minnow) 675 mg/L (IUCLID: 72 hr. Desmodesmus subspicatus) LC50: 100 mg/L (IUCLID: 96hr, Fathead minnow) LC50 / 96h Selenastrum capficornutum LC50; 100 mg/L (IUCLID: 96hr, Fathead minnow) ERC 50, alga Soenedesmus sp, static, growthratic inhibition, 72hr: > 1000 mg/L No information available ERC 50, alga Soenedesmus sp, static, growth inhibition, 1800 mg/L EC50, fathead minnow, static, 24hr immobilization: > 1000 mg/L Chronic LOEC, Selenastrum capficorniutum, 0.5 to 5 mg/L Acute LC50, Oncortiynchus mykiss, 96hr: 0.4mg/L ERC 50, green alga Pseudokirchneriella subcapitata, static, growth rate inhibition, 72hr: 672 mg/L LC50: Fathead minnow, fow-through 96hr. 60mg/L EC 50, Pseudokirchneriella subcapitata, static, growth rate, growth rate, 96hr: 225 mg/L, OECD LC50: 1,376 mg/L (96hr, Fathead minnow), OECD 203	3300 mg/L (IUCLID: 48 hr. Scenedesmus quadricauda) LCS0: 230 mg/L (IUCLID: 96hr, Fathead minnow) Bacteria: 2900mg/L (IUCLID: 16hr. Pseudomonas putida) 675 mg/L (IUCLID: 72 hr. Desmodesmus subspicatus) LCS0: 100 mg/L (IUCLID: 96hr, Fathead minnow) Not Availble 675 mg/L (IUCLID: 72 hr. Desmodesmus subspicatus) LCS0: 100 mg/L (IUCLID: 96hr, Fathead minnow) Not Availble LCS0 / 96h Selenastrum capfcornutum LCS0, fathead minnow, static, 24hr immobilization: > 1000 mg/L No Information available No Information available ERC 50, alga Scenedesmus sp, static, growth inhibition, (sell density reduction) 7 d: 1800 mg/L ECS0, fathead minnow, static, 24hr immobilization: > 1000 mg/L ERCS0: activated sludge: > 1,000 mg/L Chronic LOEC, Selenastrum capficorniutum, 0.5 to 5 mg/L Acute LCS0, Oncorhynchus mykiss, 96hr. 0.4mg/L Not Available ERC 50, green alga pseudokirchneriella subcapitata, static, growth rate inhibition, 72hr: 672 mg/L LCS0: Fathead minnow, fow-through 96hr. 60mg/L ECS: Pseudomonas putida, static, 16hr: 170mg/L EC 50, Pseudokirchneriella subcapitata, static, growth rate, 96hr: 225 mg/L, OECD LCS0: 1,376 mg/L (96hr, Fathead minnow), OECD ECS0: (Pseudomonas putida, 17hr growth Inhibition);4390mg/L, DIN38412, PART 8

SECTION 13: Disposal Considerations

Section 13.1 - Waste treatment methods

13.1.1 Product/Packaging Disposal Waste from residues /unused products:

Do not dispose in sewers/sewer system. Do not contaminate ponds, waterways or ditches with chemical or used container. The product should not be allowed to enter drains, waterways or the soil. Inform the responsible authorities in case of leaks into the atmosphere or of entry into waterways, soil or drains.

Consult a regulatory specialist to determine appropriate state or local reporting requirements, for assistance in waste characterization and/or hazardous waste disposal and other requirements listed in pertinent environmental permits. Dispose of in accordance with federal, state and local regulations or contact a hazardous waste removal, treatment and disposal company.

Uncleaned empty packaging:

Do not burn, cut, weld or grind an empty container. Emptied containers retain product residue and vapors. Follow label warnings even after container is emptied.

SECTION 14: Transport Information

Flash Point		- 4°C or 24° F TCC (Tag Closed Cup)
Marine Pollutant		Yes
	Triphenyl Phosphate*	
* Please	e refer to the 2014 CFR 49	Title - 49 Subtitle B Chapter Subchapter C Part 171 subpart 171.4 (
Bulk Tra	ansport / IBC codes	: Not applicable
DOT	Proper Shipping Name	Paint
	Technical Name	Nitrocellulose Lacquer (Ethyl Acetate, Butyl Acetate)
	U.N. number	1263
	Hazard Class	3 (Flammable Liquid)
	Packing Group	п
IATA	Proper Shipping Name	Paint
	Technical Name	Nitrocellulose Lacquer (Ethyl Acetate, Butyl Acetate)
	U.N. number	1263
	Hazard Class	3 (Flammable Liquid)
	Packing Group	П
IMDG	Proper Shipping Name	Paint
	Technical Name	Nitrocellulose Lacquer (Ethyl Acetate, Butyl Acetate)
	U.N. number	1263
	Hazard Class	3 (Flammable Liquid)
	Packing Group	п
MEX	Proper Shipping Name	Paint
	Technical Name	Nitrocellulose Lacquer (Ethyl Acetate, Butyl Acetate)
	U.N. number	1263
	Hazard Class	3 (Flammable Liquid)
	Packing Group	П
ADR	Proper Shipping Name	Paint
	Technical Name	Nitrocellulose Lacquer (Ethyl Acetate, Butyl Acetate)
	U.N. number	1263
	Hazard Class	3 (Flammable Liquid)
	Packing Group	Π
	Classification code	F1

SECTION 15: Regulatory Information

Section 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

UNITED STATES FEDERAL REGULATIONS:

SARA:	See Section 3 for reportable material.
SARA TITLE III:	See Section 3.
CERCLA:	See Section 3.
TSCA:	Components in this product have been verified as being on the TSCA Inventory.

European Inventory of Existing Commercial Chemical Substances (EINECS)

The components of this product are on the EINECS inventory or are exempt from inventory requirements.

CANADA WHMIS:

B2 - Flammable and Combustible Material D2B - Eye irritation - toxic - other

STATE REGULATIONS:

Proposition 65: None

SECTION 16: ADDITIONAL REGULATORY INFORMATION

DISCLAIMER: This SDS is intended to provide a brief summary of our knowledge and guidance regarding the use of this material. The information contained here has been compiled from sources considered by us to be dependable and is accurate to the best of the Company's knowledge. It is not meant to be an all-inclusive document on worldwide hazard communication regulations.

This information is offered in good faith. Each user of this material needs to evaluate the conditions of use and design and the appropriate protective mechanisms to prevent employee exposure, property damage or release to the environment. Star Nail International assumes no responsibility for injury to the recipient or third persons, or for any damage to any property resulting from misuse of the product.

Preparation Date of SDS: March 30, 2016 END OF SDS